


## Siding Döcke STANDARD

### 1. Purpose of the product and general information.

Siding Döcke STANDARD is an exterior cladding material from PVC designed to protect the building's facade from the effects of climatic and environmental factors.

**Siding D4,5D (Shipboard siding, 4,5")**

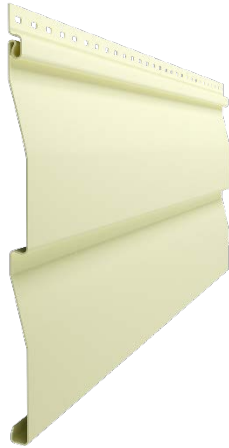



**Siding D5C (Horizontal, 5")**




### 2. Geometrical and logistics characteristics.

№	Element	Length, m	Width, mm	Thickness, mm	Area, m <sup>2</sup>	Gross weight of one package, kg	Quantity in pack, pcs	Outside package dimensions (LxWxH), mm	Package type
1	Siding D4,5D (Shipboard siding, 4,5")	3,0	230,2	1,0	0,69	25,4	20	3010x280x140	Polyethylene
2	Siding D5C (Horizontal, 5")	3,0	254	1,0	0,76	28,3	20	3026x306x146	Polyethylene

### 3. Döcke STANDARD Soffits geometrical and logistics characteristics.

№	Element	Picture	Purpose of use and geometrical parameters	Gross weight of one package, kg	Quantity in pack, pcs	Outside package dimensions (LxWxH), mm	Package type
1	Soffit T4 Solid		Decoration of roof overhangs.  Length – 3,0 m; Width – 305 mm; Area – 0,92 m <sup>2</sup> .	28,8	16	3026x351x136	Polyethylene
2	Soffit T4 Vented		Decoration of roof overhangs.  Length – 3,0 m; Width – 305 mm; Area – 0,92 m <sup>2</sup> .	28,8	16	3026x351x136	Polyethylene

№	Element	Picture	Purpose of use and geometrical parameters	Gross weight of one package, kg	Quantity in pack, pcs	Outside package dimensions (LxWxH), mm	Package type
3	Soffit T4 Centre Vented		Decoration of roof overhangs.  Length – 3,0 m; Width – 305 mm; Area – 0,93 m².	28,8	16	3026x351x136	Polyethylene

**4. Storage rules.**

- Products transportation must be carried out on vehicles with covered or tilt bodies, not shorter than the length of the transported material.
- The product must be stored only in the manufacturer original packaging.
- The product must be stored in conditions that prevent moisture and direct sunlight.
- The product must be stored only in covered rooms with ventilation, at temperatures from -35 °C to +50 °C and relative humidity 50-60%.
- For long-term storage (more than 10 days), it is necessary to use pallets or shelving, while the boxes stacking height should not exceed 1,5 m.
- It is strictly forbidden to store products:
  - without packaging;
  - in direct sunlight;
  - near heating devices (at a distance of less than 1,5 m).

**Technical support: 8 800 100 71 45, [www.docke.ru](http://www.docke.ru).**